


# **AS3246/AS3246E MOBILE ELEVATING WORK PLATFORMS**

Offering electric or hydraulic motor drive configurations, the Pettibone AS3246E and AS3246 mobile elevating work platforms provide personnel with a reliable, reinforced lift for safely working indoors at heights up to 39.4 feet.



# SPECIFICATIONS

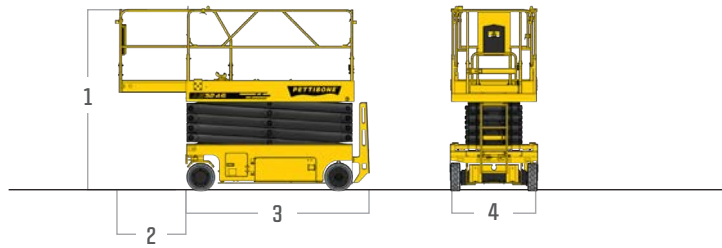

**AS3246E**

**AS3246**

DIMENSIONS			
1	<b>Overall Height</b>	6.1' (186 cm) - rails down 8' (244 cm) - rails up	6.1' (186 cm) - rails down 8' (244 cm) - rails up
2	<b>Platform Extension</b>	3' (91 cm)	3' (91 cm)
3	<b>Overall Length</b>	8.1' (247 cm)	8.1' (247 cm)
4	<b>Overall Width</b>	3.9' (119 cm)	3.9' (119 cm)
	<b>Work Height</b>	39.4' (1,201 cm)	39.4' (1,201 cm)
	<b>Machine Weight</b>	6,614 lbs (3,000 kg)	6,614 lbs (3,000 kg)
PERFORMANCE			
	<b>Platform Capacity</b>	705 lbs (320 kg)	705 lbs (320 kg)
	<b>On-Deck Extension Capacity</b>	265 lbs (120 kg)	265 lbs (120 kg)
	<b>Platform Occupants</b>	2 - indoor 1 - outdoor	2 - indoor 1 - outdoor
	<b>Drive Speed</b>	Lowered: 2.2 ± 0.12 mph (3.5 ± 0.19 km/h) Elevated: 0.5 ± 0.06 mph (0.8 ± 0.1 km/h)	Lowered: 1.9 ± 0.12 mph (3.1 ± 0.19 km/h) Elevated: 0.5 ± 0.06 mph (0.8 ± 0.1 km/h)
	<b>Lift Time</b>	58 ± 4 seconds	62 ± 4 seconds
	<b>Lower Time</b>	48 ± 4 seconds	48 ± 4 seconds
	<b>Gradeability</b>	25%	25%
	<b>Maximum Slope</b>	2° / 3°	2° / 3°
	<b>Maximum Ground Pressure</b>	173.8 psi	173.8 psi
	<b>Inside Turning Radius</b>	13" (33 cm)	13" (33 cm)
	<b>Outside Turning Radius</b>	7.5' (229 cm)	7.5' (229 cm)
	<b>Standards Compliance</b>	ANSI A92.20 CSA-B354.6	ANSI A92.20 CSA-B354.6

# FEATURES & OPTIONS

## FEATURES

Optimized electronic control system	Motion alarm
Optimized hydraulic system	Flashing beacon/buzzer
Universal drive control box	Emergency descent
Proportional control	Descent alarm and protection
Quick disconnect for control box	Overload alarm
Emergency stop device	Horn/hour meter
Platform power 120VAC (GFCI)	4x2 drive
Foot pedal control for platform extension	Extra wide, non-marking tires
Fold-in guard rails	Pothole guards
Self-closing, self-catching entry gate	Two-wheel brake
Lanyard anchor point	Manual brake release
Large scissor arms	Advanced battery charger with voltage protection
Pressure transducer	Slide-out component tray
Full-height drive	Charging status indicator
Intelligent diagnostic system	Charging operation limit
Tilt sensor and alarm	
Slope sensor	

\* Specifications are subject to change.

**PETTIBONE®**

### PETTIBONE, LLC

1100 Superior Avenue  
Baraga, MI 49908

P: 800.467.3884  
info@gopettibone.com  
www.gopettibone.com

**1 - 2 - 5  
WARRANTY**

**1 Year**

Full machine and attachment

**2 Years  
or 2,000 hrs**

Electric & hydraulic drive motors, lift cylinders, hydraulic valves, & hydraulic pumps

**5 Years**

Frame weldment, scissor stacks & platform weldment

## WARRANTY